

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Matrix Switcher
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-HD-V88M

Version History:

Driver Version	Date	IP Link Compiler	G C Version	Notes
1	9/24/2010	1.4.0	3.0.3	Initial version.

Driver Notes:

This device does not support bi-directional communication.

**IP Link[®] Device Interface
Communication Sheet**

Control Commands & States:

Output 1	1 to 8
Output 2	1 to 8
Output 3	1 to 8
Output 4	1 to 8
Output 5	1 to 8
Output 6	1 to 8
Output 7	1 to 8
Output 8	1 to 8
Power Control	On Off

Status Available:

Status Unavailable

MLC62 Supported Commands:

Output 1	1 to 8
Output 2	1 to 8
Output 3	1 to 8
Output 4	1 to 8
Output 5	1 to 8
Output 6	1 to 8
Output 7	1 to 8
Output 8	1 to 8
Power Control	On Off

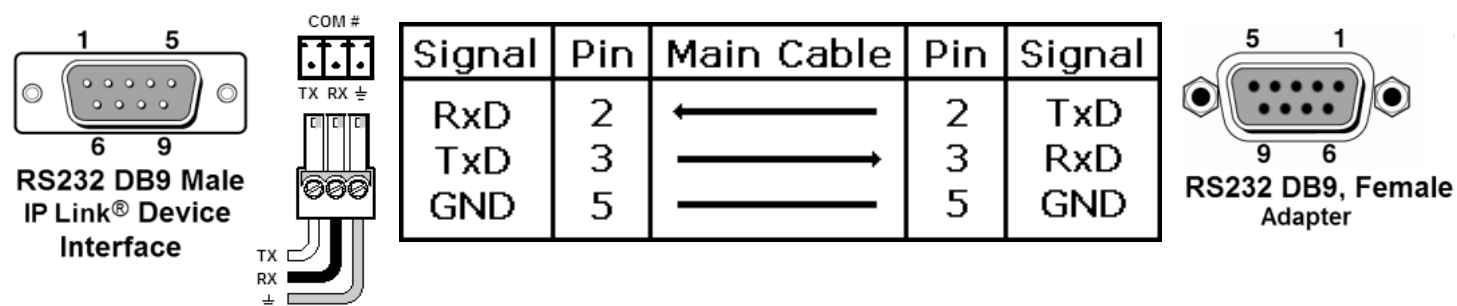
Cable and Adapter Requirements:

M/F RS-232 straight serial cable (Extron Electronics P/N 26-433-XX)

Notes for the Device:**Serial communication:**

Port Type: RS-232
Baud Rate: 9600
Data Bits: 8

Parity: None
Stop Bits: 1
Flow Control: None

Pin Assignments Diagram:

Note: Captive screw connector may also be used as a serial connection.

General Notes: